


## Overview

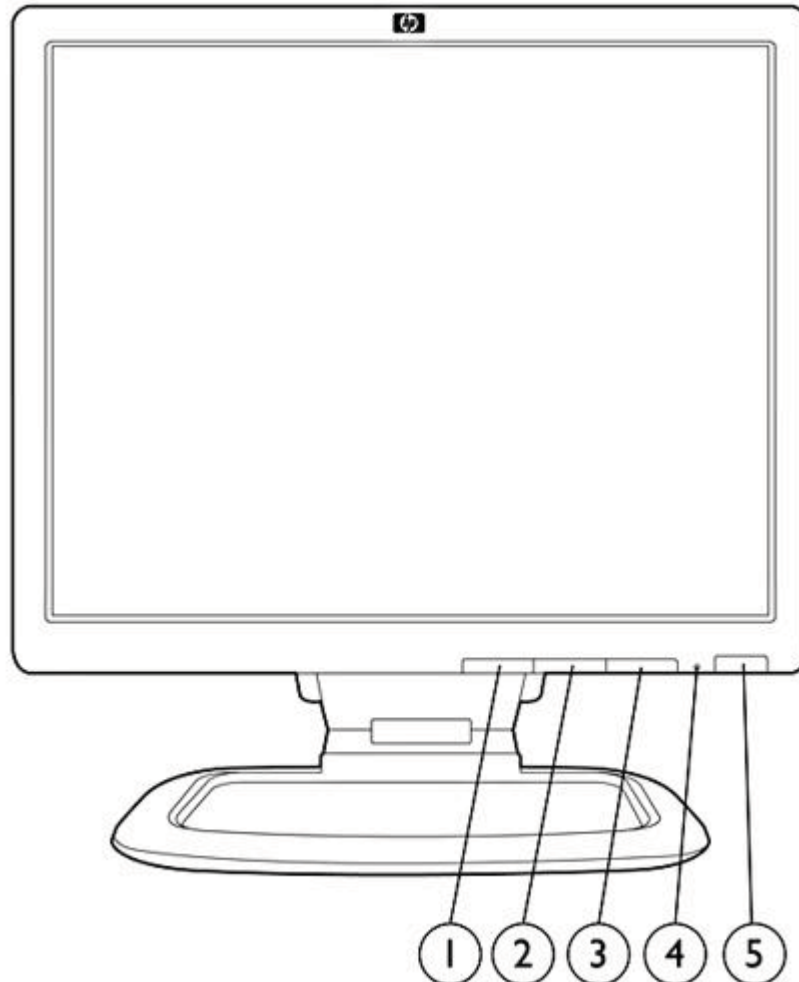

- 1. Menu/Select
- 2. "-" OSD Navigation/Decrease Adjust/Auto Adjust
- 3. "+" OSD Navigation/Increase Adjust

- 4. Power LED
- 5. Power

## Models

EM887AA

### Technical Specifications

Panel	Type	19-inch Active Matrix TFT (thin film transistor)
	Viewable Image Area (diagonal)	19 in (48.26 cm)
	Screen Opening (W x H)	14.8 x 11.9 in (37.8 x 30.3 cm)
	Panel Type	TN
	Aspect Ratio	5:4
	Viewing Angle (typical)*	160 degrees horizontal/160 degrees vertical (10:1 minimum contrast ratio)
	Brightness (typical)*	250 nits (cd/m <sup>2</sup> )
	Contrast Ratio (typical)*	1000:1
	Response Rate (typical)*	5 ms (rise + fall)
	Pixel Pitch	0.294 mm
	Backlight Lamp Life (to half brightness)	50K hours
	Color Gamut	72%
	<i>* All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.</i>	
On Screen Display (OSD) Controls	Buttons or Switches	3-button OSD (menu, minus, plus); power on/off
	Languages	English, French, German, Spanish, Italian, Dutch, Simplified Chinese (Portuguese and Japanese on regional models)
	User Controls	Image Control (auto, horizontal, vertical)
		Color Temperature (6500k, 9300k, Custom, sRGB, sharpness)
Brightness		
Contrast		
Clock, Clock Phase		
Monitor Management (power saver, sleep, power on recall, power on status, DDC/CI support, bezel power LED)		
Factory Reset		
Signal Interface/ Performance	Horizontal Frequency	24 to 83 kHz
	Vertical Frequency	50 to 76 Hz
	Native Resolution	1280 x 1024 @ 60 Hz (recommended) (SXGA)
	Maximum Resolution (Digital)	N/A
	Preset VESA Modes (non-interlaced)	1280 x 1024 @ 60 Hz
		1280 x 960 @ 60 Hz
		1280 x 800 @ 60 Hz
		1280 x 720 @ 60 Hz
		1024 x 768 @ 60 Hz
800 x 600 @ 60 Hz		
720 x 400 @ 70 Hz		
640 x 480 @ 60 Hz		
Max Pixel Clock Speed	140 MHz	

### Technical Specifications

	User Programmable Modes	Yes, 8	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Color Temperature	6500 degrees Kelvin	
Video Input	Plug and Play	Yes	
	Input Signal	15 pin D-sub (Analog VGA)	
	Input Impedance	75 ohms (2 % value change allowed)	
	Sync Input	TTL separate synch	
	Video Cable	Detachable 15-pin D-sub mini connector	
	Video Cable Length	70.8 in (1.8 m)	
Power	Input Voltage	100 - 240 VAC	
	Nominal Current	< 0.50 Ampere	
	Frequency	50/60 Hz	
	Maximum	< 28 watts	
	Typical	24 watts	
	Power Saving	< 2 watts	
	Power Cable Length	74.8 in (1.9 m); detachable	
Mechanical	Dimensions (H x W x D)	<b>Unpacked w/ stand</b>	16.4 x 16.3 x 8.1 in (41.6 x 41.4 x 20.6 cm)
		<b>Display Head only</b>	13.7 x 16.3 x 2.3 in (34.7 x 41.4 x 5.8 cm)
		<b>Packaged</b>	5.5 x 19.1 x 19.9 in (13.9 x 48.6 x 50.6 cm)
	Weight	<b>Head only</b>	9.0 lb (4.1 kg)
		<b>Unpacked</b>	10.1 lb (4.6 kg)
		<b>Packaged</b>	12.8 lb (5.8 kg)
	Tilt Range	-5 to +25 degrees vertical tilt	
	Swivel Range	None	
	Height Adjustable	No	
	Pivot Rotation	No	
	Base and Stand	Detachable	
Environmental	Temperature – Operating	41° to 95° F (5° to 35° C) non-condensing	
	Temperature– Non-operating	-4° to 140° F (-20° to 60° C)	
	Humidity – Operating	20% to 80%, non-condensing	
	Humidity – Non-operating	5% to 90%	
	Altitude – Operating	0 to 16,404 ft (0 to 5,000 m)	
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)	
Environmental Data	Eco-Label Certifications & declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:	
		<ul style="list-style-type: none"> <li>● US Energy Star®</li> <li>● IT ECO declaration</li> </ul>	

### Technical Specifications

	<ul style="list-style-type: none"> <li>● EPEAT® - Silver</li> <li>● TCO 5.0</li> </ul>		
<b>Energy Consumption</b> (in accordance with US Energy Star test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation	15.3W	15.1W	15.4W
Sleep	0.43W	0.59W	0.40W
Off	0.29W	0.45W	0.28W
<b>Heat Dissipation*</b>	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation	52 BTU/hr	52 BTU/hr	53 BTU/hr
Sleep	1 BTU/hr	2 BTU/hr	1 BTU/hr
Off	1 BTU/hr	2 BTU/hr	1 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

#### Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT®) standard at the Silver level, see [www.epeat.net](http://www.epeat.net)

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post-consumer recycled plastic (by wt.)

This product is 98.0% recycle-able when properly disposed of at end of life.

#### Packaging Materials

- External:
  - Corrugated carton – 775 g
  - Polyethylene low density – 26 g
- Internal:
  - EPS (Expanded Polystyrene) – 235 g

#### RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption

### Technical Specifications

#### Material Usage

under the EU RoHS Directive).

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at [http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

#### Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

### Technical Specifications

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Options HP LCD Speaker Bar—Part number NQ576AA Powered directly by the connected PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP LCD monitors. Features include dual speakers with full sound range and dual external headphone jacks. Sold separately. For more information, refer to the product's QuickSpecs. HP LCD Monitor Quick Release—Part number EM870AA\* An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document. HP USB Graphics Adapter—Part number NL571AA Enables connection of up to six simultaneous displays to help you boost productivity and multi-task across several open applications. Use one Adapter to bridge between a notebook or desktop PC and second monitor or use multiple Adapters to connect several displays to each other. HP Business PC Security Lock Kit—Part number PV606AA Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point. \* The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads. Other Accessories Included Detachable VGA cable, detachable AC power cord, documentation kit, and user CD. Software HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor. HP Display Assistant is a software utility that allows monitor adjustment, theft deterrence, and color calibration using the Display Data Channel Command Interface (DDC/CI) protocol of the connected PC. User Guide Languages English, Brazilian Portuguese, French, LA Spanish, Korean, Simplified Chinese, Traditional Chinese, Japanese, Danish, Dutch, Finnish, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish Warranty Languages **Americas** English, Canadian French **LA** Spanish, Brazilian Portuguese **EMEA** English, Danish, Dutch, Finnish, European French, German, Italian, Norwegian, Castilian Spanish, Swedish **Asia/Pacific** English, Bahasa, S. Chinese, T. Chinese, Korean, Japanese, Chinese Color Black/Silver VESA Mounting Support Yes (Standard 4 hole pattern, 100 mm) Kensington Lock-ready Yes Certification and Compliance ISO 9241-307 pixel defect guidelines, CISPR, VCCI, CSA (Canada), ACA (Australia), TUV and GS Mark (German ergonomic), BSMI (Taiwan), CCC (China), MIC (South Korea), NOM (Mexico), Eastern European approvals, CE Marking, FCC approval,



### Technical Specifications

ENERGY STAR® qualified, TCO '5.0 (emissions, ergonomics, environment), Microsoft® Windows® certified (Microsoft® Windows® 2000, Microsoft Windows XP, and Windows Vista®), GOST (Russia), SASO (Saudi Arabia), EN55022 Class B, IEC 60950-1, EN55024 Class B Compatibility Compatible with platforms using the VESA standard video modes. Recommended for use with HP products. Service and Warranty Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion\*. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support. \* HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: [www.hp.com/go/lookuptool](http://www.hp.com/go/lookuptool). Additional HP Care Pack Services information by product is available at: [www.hp.com/hps/carepack](http://www.hp.com/hps/carepack). Service levels and response times for HP Care Packs may vary depending on your geographic location.

© 2010 Hewlett-Packard Development Company, L.P.

Microsoft, Windows, and Windows Vista are trademarks of the Microsoft group of companies. ENERGY STAR is a registered mark owned by the U.S. government.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

For more information or to order this product,  
please contact us at:

[sales@jackrabbit.com](mailto:sales@jackrabbit.com)



**jackrabbit.com**

Ready-to-Use Technology for Small Businesses

Since 1982

*Jackrabbit Microwave - Poway, CA USA*