


Overview

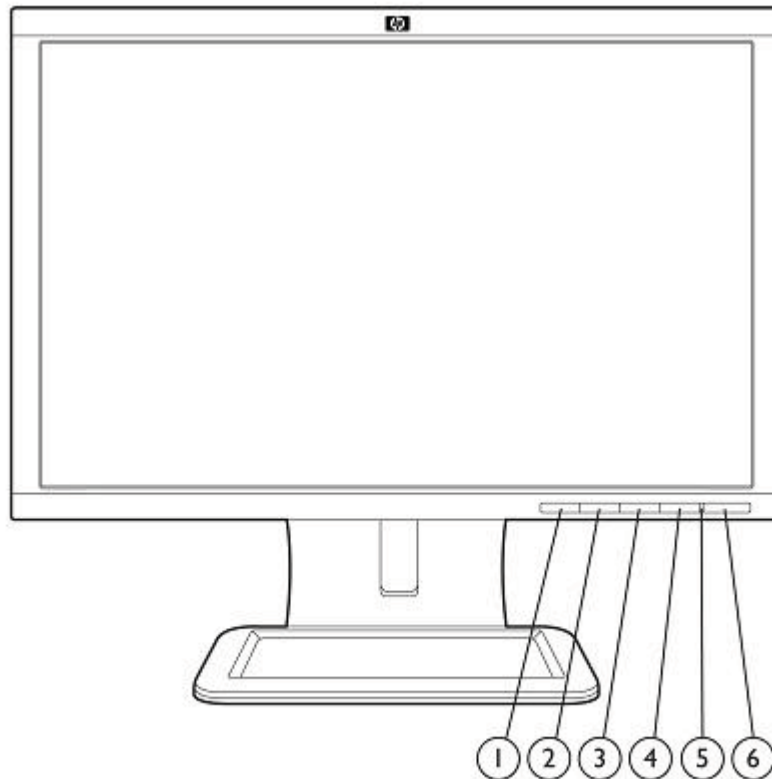

1. **Menu/select:** Opens, selects or exits the OSD menu.
2. **"-":** If the OSD menu is on, press to navigate backward through the OSD menu and decrease adjustment levels.
3. **"+"/source:** Select input source. If the OSD menu is on, press to navigate forward through the OSD menu and increase adjustment levels.
4. **OK/auto:** If the OSD menu is on, press to select the highlighted menu item. If the OSD menu is inactive, press to activate the auto adjustment feature to optimize the screen image.
5. **Power LED:** fully powered = green; sleep mode = amber; sleep timer mode = flashing amber.
6. **Power:** Turns the monitor on or off.

Part Number

Model: NM274AA#ABA

For more information or to order this product,
please contact us at:

sales@jackrabbit.com



jackrabbit.com

Ready-to-Use Technology for Small Businesses
Since 1982

Jackrabbit Microware - Poway, CA USA

QuickSpecs

HP Compaq LA2205wg 22-inch Widescreen LCD Monitor

Technical Specifications

Panel	Type	22-inch Wide-Aspect Active Matrix TFT (thin film transistor)
	Viewable Image Area	22 in (55.9 cm) widescreen; diagonally measured
	Screen Opening (W x H)	18.8 x 11.8 in (47.8 x 30.0 cm)
	Panel Type	TN
	Aspect Ratio	16:10
	Viewing Angle (typical)	Up to 160° horizontal/160° vertical (10:1 minimum contrast ratio)
	Brightness (typical)*	250 nits (cd/m ²)
	Contrast Ratio (typical)*	1000:1
	Dynamic Contrast Ratio (typical)*	3000:1
	Response Rate (typical)*	5 ms (on/off)
	Pixel Pitch	0.282 mm
	Backlight Lamp Life (to half brightness)	50K hours
	Color Gamut	72% color gamut (NTSC,TYP)
	<i>*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.</i>	
On Screen Display (OSD) Controls	Buttons or Switches	OSD menu, OSD up, Source select/OSD down, Auto adjust/OK, Power. (from left to right)
	Languages	English, French, German, Spanish, Italian, Dutch, and Japanese, S. Chinese, T.Chinese, Brazilian Portuguese
	User Controls	Brightness, contrast, positioning, color temperature (6500k, 9300k, custom), individual color control, serial number, display, clock, clock phase, monitor management, factory reset
Signal Interface/ Performance	Horizontal Frequency	24 to 83 kHz
	Vertical Frequency	50 to 76 Hz
	Native Resolution	1680 x 1050 @ 60 Hz (WSXGA+), 1.76 Million pixels
	Preset VESA Graphic Modes (non-interlaced)	1680 x 1050 @ 60 Hz
		1600 x 1200 @ 60 Hz
		1600 x 1000 @ 60 Hz
		1440 x 900 @ 60 Hz
		1280 x 1024 @ 60 Hz
		1280 x 960 @ 60 Hz
		1024 x 768 @ 60 Hz
800 x 600 @ 60 Hz		
640 x 480 @ 60 Hz		
Text Mode	720 x 400 @ 70 Hz	
Mac Mode	Not supported	
Sun Mode	Not supported	
Maximum Pixel Clock Speed	165 MHz (analog input); 165 MHz (DVI input), 230 Mhz (DisplayPort)	



QuickSpecs

HP Compaq LA2205wg 22-inch Widescreen LCD Monitor

Technical Specifications

	User Programmable Modes	Yes, 20	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Color Temperature	6500 K	
Video/Other Inputs	Plug and Play	Yes	
	Self Powered USB 2.0 Hub	One upstream, two downstream ports (cable included)	
	Input Connectors	VGA, DVI-D, and DisplayPort connectors; HDCP support	
	Input Impedance	75 ohms \pm 10%	
	Sync Input	TTL separate synch	
	Video Cable	One DVI-D to DVI-D and one 15-pin D-sub (VGA)	
	Video Cable Lengths	VGA 5.9 ft (1.8 m), DVI-D 5.9 ft (1.8 m)	
Power	Input Power	Auto-Sensing, (100 to 240 VAC) \pm 10%	
	Frequency	47 to 63 Hz	
	Typical Power Consumption	25 watts (without speaker/with 25% USB)	
	Maximum	33 watts	
	Power Saving	< 1 watts standby; < 0.5 watt off	
	Power Cable Length	6.2 ft (1.9 m)	
Mechanical	Dimensions (H x W x D)	Unpacked w/stand 14.7 to 17.8 x 20.13 x 10.04 in (37.35 to 45.22 x 51.12 x 25.49 cm)	
		Unpacked w/o stand (head only) 13.13 x 20.13 x 2.44 in (33.35 x 51.12 x 6.2 cm)	
		Packaged 23.27 x 19.37 x 9.09 in (59.1 x 49.2 x 23.1 cm)	
	Weight	Head Only 9.37 lb (4.25 kg)	
		Unpacked 15.04 lb (6.82 kg)	
		Packaged 24.92 lb (11.3 kg)	
	Tilt Range	-5° to + 30° vertical	
	Swivel Range	-170° to + 170°	
	Height Adjustable	Yes, up to 4.72 in (12.0 cm)	
	Pivot Rotation	Yes	
	Base	Attachable, ships attached	
Environmental	Temperature – Operating	41° to 95° F (5° to 35° C)	
	Temperature – Non-operating	-29° to 140° F (-20° to 60° C)	
	Humidity – Operating	20% to 80% non-condensing	
	Humidity – Non-operating	5% to 95%, 38.7° C max wet-bulb	
	Altitude – Operating	0 to 16,404 ft (0 to 5,000 m)	
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)	



Technical Specifications

Environmental Data

Eco-Label Certifications and Declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- ENERGY STAR®
- IT ECO declaration
- EPEAT® Gold

Energy Consumption(in accordance with ENERGY STAR® test method)

	115VAC, 60 Hz	230VAC, 50 Hz	100VAC, 60 Hz
Normal Operation	21.13 W	21.39 W	21.34 W
Sleep	0.56 W	0.52 W	0.56 W
Off	0.45 W	0.43 W	0.48 W

Heat Dissipation*

	115VAC, 60 Hz	230VAC, 50 Hz	100VAC, 60 Hz
Normal Operation	72 BTU/hr	73 BTU/hr	73 BTU/hr
Sleep	2 BTU/hr	2 BTU/hr	2 BTU/hr
Off	2 BTU/hr	1 BTU/hr	2 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Ergonomics

The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays.

Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive, 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see: www.epeat.net.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Display meets the requirement for low frequency electromagnetic fields per TCO and prEN50279 A/B/C.

This product contains 0% recycled materials (by wt.)

This product is 93,4% recyclable when properly disposed of at end of life.

External:

- Paper / Cardboard 3062 g
- Polyethylene high density 24 g
- This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for

Material Usage



Technical Specifications

the Environment at :

www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment: Global Citizenship Report www.hp.com/hpinfo/globalcitizenship/gcreport/index.html



Technical Specifications

		Eco-label certifications www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html ISO 14001 certificates: www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html
Options	HP LCD Speaker Bar— Part number NQ576AA	Powered directly by the connected PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP LCD monitors. Features include dual speakers with full sound range and dual external headphone jacks. Sold separately. For more information, refer to the product's QuickSpecs.
	HP LCD Monitor Quick Release—Part number EM870AA*	An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach a flat panel monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document.
	HP Integrated Work Center Stand—Part number GN783AA	Allows mounting of a 17-, 19-, or 22-inch diagonal HP LCD monitor and an HP Compaq dc7800 or dc7900 Ultra-slim Desktop PC or HP t5000 series Thin Client on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpecs document.
	HP USB Graphics Adapter—Part number NL571AA	Enables connection of up to six simultaneous displays to help you boost productivity and multi-task across several open applications. Use one Adapter to bridge between a notebook or desktop PC and second monitor or use multiple Adapters to connect several displays to each other.
	HP Business PC Security Lock Kit—Part number PV606AA	Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.
	DisplayPort Cable Kit—Part number VN567AA	Allows digital connectivity to the monitor's DisplayPort video input and the PC's DisplayPort video connector.
	<p>* The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) depending upon the mounting configuration used. Please note this is a total weight limit for all devices mounted, i.e. the combined weight of the monitor and a second device such as an HP Compaq Thin Client cannot exceed 24 pounds. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.</p>	
Other	Accessories Included	VGA cable, DVI-D to DVI-D cable, USB cable, power cable, user CD-ROM
	Software	HP Display Assistant is a software utility that enables theft deterrence and allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected PC. HP Display LiteSaver allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.

Technical Specifications

	<p>Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.</p>
User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
Bezel Color	Brushed Aluminum and Black
VESA External Mounting	Yes (one set of standard 4-hole pattern, 100 mm). Use of the top VESA 4-hole pattern will allow the user to set monitor head lower to the desk surface.
Security Lock-Ready	Yes, one slot available
Certification and Compliance	TCO5 (Low Emissions), ISO 9241-307, CISPR Requirements, VCCI Approvals, KC and KCC (Korean) Requirements, CSA 60950-1, UL 60950-1, EN55022 Class B, CNS 13438 Class B, IEC 60950-1, China Energy Label (CEL), China MEPS, Korea MEPS (pending, Energy Boy), SmartWay - NA only - Energy logistics, EUP Lot 6 Tier 1 AS/NZS 3548 Class B Approval, "GS" Mark, TUV Approvals, GEEA, CE Marking, FCC Part 15 class B Approval, ENERGY STAR® qualified, EN55024 Class B, EN60950 - 1, CUL, CCIB, CCEE, IT ECO (EDS), EPEAT® Gold (select regions)
Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty	<p>Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion.* With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.</p> <p>* HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: www.hp.com/go/lookuptool. Additional HP Care Pack Services information by product is available at: www.hp.com/hps/carepack. Service levels and response times for HP Care Packs may vary depending on your geographic location.</p>

© Copyright 2009 Hewlett-Packard Development Company, L.P.

ENERGY STAR is a registered mark owned by the U.S. government. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

